

P-03 QUICK PLASTER PROFILE

Description


P-03 POFIX QUICK PLASTER PROFILE

P-03 QUICK PLASTER PROFILE Where flat surfaces are to be created, such as with tiling work, a quick plastering profile like this is popular. Product features of P-03, quick plastering profile for plaster thickness.

Why you should grab it: The quick plastering profile made of perforated and galvanized steel is used for various indoor plastering jobs. It helps straighten crooked walls and create clean edges. The additional use of lateral beads increases the stability. Good to know that this profile is not suitable for damp rooms. Stainless steel rails would be the right choice here.

Each quick plaster profile measures 2500 x 22 mm. It is offered in economic packs of 25/50 pieces. The range can of course also come up with various plasters such as gypsum, lime cement, and cement plaster. You should have a reasonable angle grinder at hand to smooth the respective surface afterward. You can also get that here.

Nailed down: With this silver-colored profile made or plastering work can be carried out quickly and smoothly.

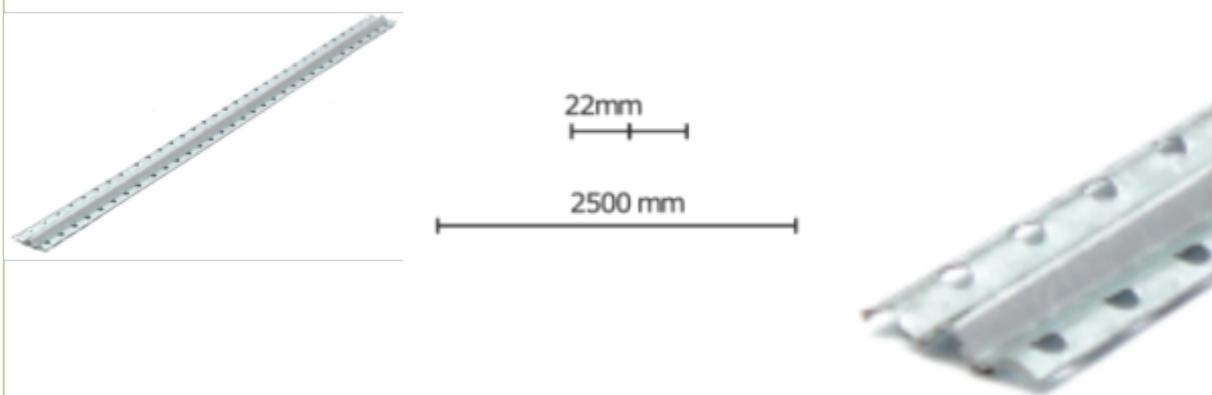

Specifications

length

Parameters

2500 mm

Application thickness

0-1 mm.

width Page 1

22 mm.

scope of application

Wall