




PODECOR

Description

Podecor is a ready-mixed acrylic mortar, a decorative coat with colored stones. It is ideal for house pedestals, basement, and garage entrances. It is applied on external and internal walls, where durability and decoration are desired, on concrete walls, mineral surfaces, gypsum board, etc, where previously Poputzgrund is applied.

Podekor is high quality and resistant to climate conditions.

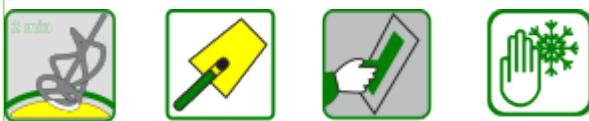

Preparation and application

Parameters

Time for application after mixing with water	/
Drying time of material	24 h.
Application thickness	1 mm.
Granulation	20
Consumption	300 g/m2.
The temperature of the air and surface	+5/+25°C
Color	By Choice
Kg bag	10/20
Bags/pallet	60/36

Date Created

07.05.2023

Author

admin