




## POFIX-90

### Description

#### Mortar with gypsum base

**Pofix 90** is the mortar with gypsum, lime, and additive primer for machine and hand application. It is used as a base mortar for finishing mortar with mineral content, structural mortar, and sliding mortar. Applied in interior walls, bricks, concrete blocks, rough concrete surfaces, ceilings, etc. The use of Pobetonconactit is essential on smooth concrete surfaces.

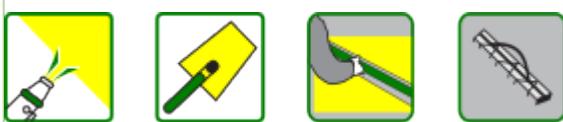

POFIX

#### Preparation and application

#### Parameters

Time for application after mixing with water	/
Drying time of material	24 h.
Application thickness	18 mm.
Granulation	0-1.3 mm.
Consumption	15 kg/m <sup>2</sup> .
The temperature of the air and surface	+5/+35°C
Color	
Kg bag	30
Bags/pallet	42

#### Date Created

01.05.2023

#### Author

admin